

Computation in Projective Space

Václav Skala

Department of Computer Science and Engineering, University of West Bohemia
 Univerzitní 8, Box 314, CZ 306 14 Plzeň, Czech Republic
<http://Graphics.zcu.cz>

Abstract: This paper presents solutions of some selected problems that can be easily solved by the projective space representation. If the principle of duality is used, quite surprising solutions can be found and new useful theorems can be generated as well. There are many algorithms based on computation of intersection of lines, planes, barycentric coordinates etc. Those algorithms are based on representation in the Euclidean space. Sometimes, very complex mathematical notations are used to express simple mathematical solutions. It will be shown that it is not necessary to solve linear system of equations to find the intersection of two lines in the case of E^2 or the intersection of three planes in the case of E^3 .

Plücker coordinates and principle of duality are used to derive an equation of a parametric line in E^3 as an intersection of two planes. This new formulation avoids division operations and increases the robustness of computation.

Key-words: Computer Graphics; Homogeneous Coordinates; Plücker Coordinates; Principle of Duality; Intersections Computation; Projective Geometry.

1. Introduction

The homogeneous coordinates are used in computer graphics and related fields to represent geometric transformations, projections. They are often thought to be just a mathematical tool to enable representation of fundamental geometric transformations by matrix or vector multiplications. The homogeneous coordinates are not the only ones available. Nevertheless, they are often used for point/line/plane description in the projective space.

Algorithms for intersection computations are usually performed in the Euclidean space using the Euclidean coordinates. Primitives are converted from the homogeneous coordinates to the Euclidean coordinates before computation and the result is converted back to the homogeneous coordinates for future manipulations. This is quite visible especially within the graphical pipeline.

Unfortunately, these conversions are time consuming and require division operations, which cause instability and decrease robustness in some situations. There are some simple problems like intersection of lines or planes, where computer scientists have trouble if the Euclidean coordinates are used. On the other hand, the homogeneous coordinates cause some difficulties in development of new algorithms. Of course, it is necessary to understand principle of the projective geometry and geometrical interpretation of the projective space.

2. Projective geometry

The homogeneous coordinates are mostly introduced with geometric transformations concepts and used for the projective space representation. Nevertheless, geometrical interpretation is missing in nearly all publications. Therefore, the question is how to imagine the projective space P^2 and representations of elements.

Conversion from the homogeneous coordinates to the Euclidean coordinates is defined for E^2 case as:

$$X = x / w \quad Y = y / w \quad (1)$$

where: $w \neq 0$, point $\mathbf{x} = [x, y, w]^T$ and $\mathbf{x} \in P^2$, $\mathbf{X} = [X, Y]^T$ and $\mathbf{X} \in E^2$,

if $w = 0$ then \mathbf{x} represents “an ideal point”, that is a point in infinity.

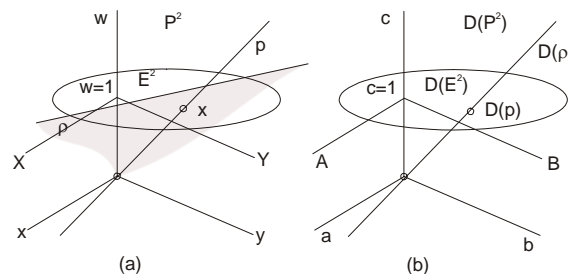


Figure 1: Euclidean, projective and dual space representations

Let us consider a situation at Fig.1.a. We can see that the point $\mathbf{X} \in E^2$ in the Euclidean space is actually a line p in the projective space P^2 passing the given

point $\mathbf{X} \in E^2$ at the plane $w = 1$ (that is the Euclidean space actually) and the origin of the projective space P^2 . It means that all the points $\mathbf{x} \in P^2$ of the line (excluding $[0, 0, 0]^T$) represent the same point in the Euclidean space. Similarly, transformation for the E^3 case is defined as:

$$X = x/w \quad Y = y/w \quad Z = z/w \quad (2)$$

where: $w \neq 0$, point $\mathbf{x} = [x, y, z, w]^T$ and $\mathbf{x} \in P^3$, $\mathbf{X} = [X, Y, Z]^T$ and $\mathbf{X} \in E^3$.

Let us assume the Euclidean space E^2 , see Fig.1.a. We actually use the projective space whenever we use the implicit representation for graphical elements.

Let us imagine that the Euclidean space E^2 is represented as a plane $w = 1$. For simplicity, let us consider a line p defined as:

$$aX + bY + c = 0 \quad (3)$$

We can multiply it by $w \neq 0$ and we get:

$$ax + by + cw = 0 \quad (4)$$

It is actually a plane in the projective space P^2 (excluding the point $[0, 0, 0]^T$) passing through the origin. The vector of coefficients \mathbf{p} represents the line $p \in E^2$:

$$\mathbf{p} = [a, b, c]^T \quad (5)$$

Let us assume a dual representation, see Fig.1.b. In the dual representation in which the point $[a, b, c]^T$ actually represents a line $D(p) \in D(E^2)$ given by the point $[a, b, c]^T$ and the origin of the dual space, see [1], [2] for details on projective geometry. It is necessary to note that any $\xi \neq 0$ can multiply the Eq.4 without any effect to the geometry. It means that there will be different vectors of coefficients \mathbf{p} that will represent the same line $p \in E^2$.

In the dual coordinate system, those points will form a line $D(p)$. We can project the line $D(p)$ e.g. to a plane with $c = 1$ and we get a point. The line $p \in E^2$ is actually represented in projective space by a plane $\rho \in P^2$ (the origin $[0, 0, 0]^T$ is excluded). It means that the line $p \in E^2$ is a point in the **dual representation** $D(p) \in D(E^2)$ and vice versa. On the other hand, there is a phenomenon of a principle of duality that can be used for derivation of some useful formula.

3. Principle of duality

The principle of duality in E^2 states that any theorem remains true when we interchange the words “point” and “line”, “lie on” and “pass through”, “join” and “intersection”, “collinear” and “concurrent” and so on. Once the theorem has been established, the dual theorem is obtained as described above, see [3], [4] for details.

In other words, the principle of duality says that in all theorems it is possible to substitute the term “point” by the term “line” and the term “line” by the term “point” etc. in E^2

and the given theorem stays valid. Similar duality is valid for E^3 as well, i.e. the terms “point” and “plane” are dual etc. This helps a lot to solve some geometrical problems.

3.1 E^2 case

In the E^2 case, parameters of a line given by two points or an intersection point of two lines are computed very often. We will use the duality principle in which a point is dual to a line and vice versa.

In the first case, the solution is simple if the points are not in the homogeneous coordinates. If they are given in the homogeneous coordinates, the coordinates are converted to the Euclidean coordinates and then parameters of the line are computed.

In the second case, a linear system of equations of the degree two is usually solved and division is to be performed. It is necessary to note that any division operation decreases robustness of computation.

A new approach performing an appropriate computation in projective space will be presented. It will allow us to avoid division operations.

Definition₁

The cross-product of two vectors $\mathbf{x}_1, \mathbf{x}_2 \in E^2$, if given in the homogeneous coordinates, is defined as (if $w = 1$ the standard formula is obtained):

$$\mathbf{x}_1 \times \mathbf{x}_2 = \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ x_1 & y_1 & z_1 \\ x_2 & y_2 & z_2 \end{vmatrix} \quad (6)$$

where: $\mathbf{i} = [1, 0, 0]^T, \mathbf{j} = [0, 1, 0]^T, \mathbf{k} = [0, 0, 1]^T$

$$w_1 w_2 (\mathbf{X}_1 \times \mathbf{X}_2) = \mathbf{x}_1 \times \mathbf{x}_2 =$$

$$= \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ x_1 & y_1 & w_1 \\ x_2 & y_2 & w_2 \end{vmatrix} = w_1 w_2 \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ \frac{x_1}{w_1} & \frac{y_1}{w_1} & 1 \\ \frac{x_2}{w_2} & \frac{y_2}{w_2} & 1 \end{vmatrix} = \quad (7)$$

$$w_1 w_2 \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ X_1 & Y_1 & 1 \\ X_2 & Y_2 & 1 \end{vmatrix}$$

Theorem₁

Let two points $\mathbf{x}_1, \mathbf{x}_2 \in E^2$ be given in the projective space. Then a line $p \in E^2$ defined by those two points is determined as a cross-product:

$$\mathbf{p} = \mathbf{x}_1 \times \mathbf{x}_2 \quad (8)$$

where: $\mathbf{p} = [a, b, c]^T$

Proof₁

Let the line $p \in E^2$ is defined as:

$$ax + by + c = 0 \quad (9)$$

The end-points must satisfy Eq.9 and therefore $x_1^T p = 0$ and $x_2^T p = 0$, i.e.

$$\begin{bmatrix} x_1 & y_1 & w_1 \\ x_2 & y_2 & w_2 \end{bmatrix} \begin{bmatrix} a \\ b \\ c \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \end{bmatrix} \quad (10)$$

It can be seen that it is a standard formula [5] if the Eq.7 is used:

$$a = \begin{vmatrix} y_1 & 1 \\ y_2 & 1 \end{vmatrix} \quad b = -\begin{vmatrix} x_1 & 1 \\ x_2 & 1 \end{vmatrix} \quad c = \begin{vmatrix} x_1 & y_1 \\ x_2 & y_2 \end{vmatrix} \quad (11)$$

and therefore the cross-product defines the line p , i.e.

$$p = x_1 \times x_2 \quad (12)$$

□

Note: It can be seen that Eq.8 is valid also for cases when $w \neq 0$ and $w \neq l$. Coefficients a, b, c can be determined as sub-determinants in the Eq.10. The proof is left to a reader.

Now we can apply the principle of duality directly.

Theorem₂

Let two lines $p_1, p_2 \in E^2$ be given in the projective space. Then a point x defined as an intersection of those two lines is determined as a cross product:

$$x = p_1 \times p_2. \quad (13)$$

where: $x = [x, y, w]^T$

Proof₂

This is a direct consequence of the principle of duality application.

$$x = p_1 \times p_2 = \begin{vmatrix} x & y & w \\ a_1 & b_1 & c_1 \\ a_2 & b_2 & c_2 \end{vmatrix} \quad (14)$$

where: $x = [x, y, w]^T$

□

These two theorems are very important as they enable us to handle some problems defined in the homogeneous coordinates directly and make computations quite effective.

Direct impact of these two theorems is that it is very easy to compute a line given by two points in E^2 and an intersection point of two lines in E^2 as well. The presented approach is convenient if vector-vector operations are supported, especially for GPU applications. Note that we do not need to solve linear system of equations to find the intersection point of two lines and if the result can remain in the homogeneous coordinates, no division operation is needed.

Of course, there is a question, how to handle the E^3 cases.

3.2 E^3 case

The E^3 case is a little bit complicated as the projective geometry and duality offer more possibilities, but generally a point is dual to a plane and vice versa. So let us explore how to find:

- a plane defined by three points given in the homogeneous coordinates,
- an intersection point of three planes.

To find a plane is simple if points are converted to the Euclidean coordinates. It requires use of the division operation and therefore robustness is decreased in general.

Let us explore the extension possibility of the E^2 cases, as discussed above, to the E^3 case.

Definition₂

The cross-product of three vectors x_1, x_2 and x_3 is defined as:

$$x_1 \times x_2 \times x_3 = \begin{vmatrix} i & j & k & l \\ x_1 & y_1 & z_1 & w_1 \\ x_2 & y_2 & z_2 & w_2 \\ x_3 & y_3 & z_3 & w_3 \end{vmatrix} \quad (15)$$

where: $i = [1, 0, 0, 0]^T$, $j = [0, 1, 0, 0]^T$, $k = [0, 0, 1, 0]^T$, $l = [0, 0, 0, 1]^T$

Theorem₃

Let three points x_1, x_2, x_3 be given in the projective space. Then a plane $\rho \in E^3$ defined by those three points is determined as:

$$\rho = x_1 \times x_2 \times x_3 \quad (16)$$

Proof₃

Let the plane $\rho \in E^3$ be defined as:

$$ax + by + cz + d = 0 \quad (17)$$

It can be seen that:

$$a = \begin{vmatrix} y_1 & z_1 & w_1 \\ y_2 & z_2 & w_2 \\ y_3 & z_3 & w_3 \end{vmatrix} \quad b = -\begin{vmatrix} x_1 & z_1 & w_1 \\ x_2 & z_2 & w_2 \\ x_3 & z_3 & w_3 \end{vmatrix} \quad (18)$$

$$c = \begin{vmatrix} x_1 & y_1 & w_1 \\ x_2 & y_2 & w_2 \\ x_3 & y_3 & w_3 \end{vmatrix} \quad d = -\begin{vmatrix} x_1 & y_1 & z_1 \\ x_2 & y_2 & z_2 \\ x_3 & y_3 & z_3 \end{vmatrix}$$

that is the cross-product that defines a plane ρ if three points are given and therefore:

$$\rho = x_1 \times x_2 \times x_3 \quad (19)$$

□

Note: It can be seen that it is a standard formula for the case $w = 1$ [5]. The proof is left to a reader.

As a point is dual to a plane, a plane is dual to a point we can use the principle of duality directly, now.

Theorem₄

Let three planes ρ_1, ρ_2 and ρ_3 be given in the projective space. Then a point x , which is defined as the intersection point of those three planes, is determined as:

$$x = \rho_1 \times \rho_2 \times \rho_3 \quad (20)$$

where: $x = [x, y, z, w]^T$

Proof₄

This is a direct consequence of the principle of duality application:

$$x = \rho_1 \times \rho_2 \times \rho_3 = \begin{vmatrix} i & j & k & l \\ a_1 & b_1 & c_1 & d_1 \\ a_2 & b_2 & c_2 & d_2 \\ a_3 & b_3 & c_3 & d_3 \end{vmatrix} \quad (21)$$

where: $x = [x, y, z, w]^T$

□

These two theorems are very important as they enable us to handle some problems defined in the homogeneous coordinates efficiently and make computations quite effective. Even more, if an input is in the Euclidean or homogeneous coordinates and output can be in the homogeneous coordinates, no division is needed. It means that we have robust computation of an intersection point.

Direct impact of these two theorems is that it is very easy to compute a plane in the E^3 given by three points in the E^3 and compute an intersection point determined as an intersection of three planes in the E^3 . Of course, there is a question, how to handle lines in the E^3 or P^3 cases.

The above mentioned formulae Eq.16 and Eq.20 are not known in general and the authors present explicit formulae for the Euclidean coordinates, i.e. for $w = 1$, see Eq.41 and formula 44.

3.3 Line in E^3 defined parametrically

Let us consider a little bit more difficult problems formulated as follows:

1. determine a line $q \in E^3$ if given by two points x_i ,
 2. determine a line $q \in E^3$ if given by two planes ρ_i .
- if the parametric form is required.

These problem formulations seem to be trivial problems if $w_i = 1$ and the division operation are permitted.

On the other hand, a classic rule for robustness is to “postpone division operation to the last moment possible”. Even if division is permitted, the 2nd case seems to be more difficult not only from the robustness point of view as the line is considered as an intersection of two planes, i.e. a common solution of their implicit equations.

We will derive a new method for determination of a line in the E^3 for those two possible cases without use of division directly in the projective space.

The Plücker coordinates will be used as they can help us to formalize and resolve this problem efficiently.

4. Plücker coordinates

The formulae presented above enable us to handle points and planes in E^3 . Nevertheless, it is necessary to have a way to handle lines in the E^3 in the parametric form using the homogeneous coordinates as well and avoid the division operations, too. A parametric form for a line given by two points in the Euclidean coordinates is given as:

$$X(t) = X_1 + (X_2 - X_1) t \quad (22)$$

where: t is a parameter $t \in (-\infty, \infty)$.

This is straightforward for the Euclidean coordinates and for the homogeneous coordinates if the division operation is permitted. It is necessary to represent a position and a direction, see Eq.22. The question is how to make it directly in the projective space using the homogeneous coordinates. Therefore, the Plücker coordinates will be introduced to resolve the situation. Another approach using the Grassmann coordinate system can be found in [6].

Let us consider two points in the homogeneous coordinates:

$$x_1 = [x_1, y_1, z_1, w_1]^T \quad x_2 = [x_2, y_2, z_2, w_2]^T \quad (23)$$

The Plücker coordinates l_{ij} are defined as follows:

$$\begin{aligned} l_{41} &= w_1 x_2 - w_2 x_1 & l_{23} &= y_1 z_2 - y_2 z_1 \\ l_{42} &= w_1 y_2 - w_2 y_1 & l_{31} &= z_1 x_2 - z_2 x_1 \\ l_{43} &= w_1 z_2 - w_2 z_1 & l_{12} &= x_1 y_2 - x_2 y_1 \end{aligned} \quad (24)$$

It is possible to express the Plücker coordinates as

$$l_{ij} = x_1^{(i)} x_2^{(j)} - x_2^{(i)} x_1^{(j)} \quad (25)$$

alternatively, as an anti-symmetric matrix L :

$$L = x_1 x_2^T - x_2 x_1^T \quad (26)$$

where: $l_{ij} = -l_{ji}$ and $l_{ii} = 0$.

Let us define two vectors ω and v as:

$$\omega = [l_{41}, l_{42}, l_{43}]^T \quad v = [l_{23}, l_{31}, l_{12}]^T \quad (27)$$

It means that ω represents the “directional vector”, while v represents the “positional vector”. It can be seen that for the Euclidean space ($w = 1$) we get:

$$X_2 - X_1 = \omega \quad X_1 \times X_2 = v \quad (28)$$

where: $X_i = [x_i, y_i, z_i]^T / w_i$ are points in the Euclidean coordinates.

For general case $w_i \neq 1$ when x_i are not ideal points, i.e. $w_i \neq 0$ we get:

$$X_2 - X_1 = \left(\frac{x_2}{w_2} - \frac{x_1}{w_1}, \frac{y_2}{w_2} - \frac{y_1}{w_1}, \frac{z_2}{w_2} - \frac{z_1}{w_1} \right) \quad (29)$$

It can be seen that for the projective space, vectors ω and v can be expressed as:

$$\begin{aligned} \omega &= w_2 w_1 (X_2 - X_1) = \\ &= (x_2 w_1 - x_1 w_2, y_2 w_1 - y_1 w_2, z_2 w_1 - z_1 w_2) \\ &= (l_{41}, l_{42}, l_{43}) \end{aligned} \quad (30)$$

and

$$\begin{aligned} v &= w_2 w_1 (X_1 \times X_2) = \\ &= (y_1 z_2 - y_2 z_1, z_1 x_2 - z_2 x_1, x_1 y_2 - x_2 y_1) = \\ &= (l_{23}, l_{31}, l_{12}) \end{aligned} \quad (31)$$

The Eq.30 and Eq.31 show the relation between vectors ω and v and the Plücker coordinates l_{ij} . In 1871 Klein derived that $\omega^T v = 0$ [7], i.e. in the Plücker coordinates:

$$l_{23} * l_{41} + l_{31} * l_{42} + l_{12} * l_{43} = 0 \quad (32)$$

This is a homogeneous equation of degree 2 and therefore the solution lies on a 4-dimensional quadratic hyper-surface [8]. If q is a point on a line $q(t) = q_1 + \omega t$ given by the Plücker coordinates, it must satisfy equation:

$$\omega \times q = v \quad (33)$$

Let $X_2 - X_1 = \omega$ and $X_1 \times X_2 = v$. A point on the line $q(t) = q_1 + \omega t$ is defined as:

$$q(t) = \frac{v \times \omega}{\|\omega\|^2} + \omega t \quad (34)$$

Please, see Appendix A for derivation of this formula. It should be noted that for $t = 0$ we do not get the point X_1 . If $\|\omega\| = 0$ the given points are equal.

The Eq.34 defines a line $q(t)$ in the E^3 by two points x_1 and x_2 given in the homogeneous coordinates. Of course, we can avoid the division operation easily using homogeneous notation for a scalar value $\tilde{q}(t)$, as follows:

$$\tilde{q}(t) = \begin{bmatrix} v \times \omega + t\omega \|\omega\|^2 \\ \|\omega\|^2 \end{bmatrix} \quad (35)$$

and the resulting line is defined directly in the projective space P^3 .

Let us imagine that we have to solve the second problem, i.e. a line defined as an intersection of two given planes ρ_1 and ρ_2 in the Euclidean space:

$$\rho_1 = [a_1, b_1, c_1, d_1]^T \quad \rho_2 = [a_2, b_2, c_2, d_2]^T \quad (36)$$

It is well known that the directional vector s of the line is given by those two planes as a ratio:

$$s_x : s_y : s_z = \begin{vmatrix} b_1 & c_1 \\ b_2 & c_2 \end{vmatrix} : \begin{vmatrix} c_1 & a_1 \\ c_2 & a_2 \end{vmatrix} : \begin{vmatrix} a_1 & b_1 \\ a_2 & b_2 \end{vmatrix} \quad (37)$$

that is actually the ratio $l_{23} : l_{31} : l_{12}$ if the principle of duality is used, i.e. vector of $[a_i, b_i, c_i, d_i]^T$ instead of $[x_i, y_i, z_i, w_i]^T$ is used, and it defines the vector v instead of ω .

Now we can apply the principle of duality as we can interchange the terms ‘‘point’’ and ‘‘plane’’ and exchange v and ω in the Eq.34 and we get:

$$q(t) = \frac{\omega \times v}{\|v\|^2} + vt \quad (38)$$

and similarly to the Eq.35, the formula for the line in the homogeneous coordinates is given as:

$$\tilde{q}(t) = \begin{bmatrix} \omega \times v + t\omega \|v\|^2 \\ \|v\|^2 \end{bmatrix} \quad (39)$$

If $\|v\| = 0$ then the given planes are parallel.

It means that we have obtained the known formula for an intersection of two planes ρ_1, ρ_2 in the Euclidean coordinates, see [5]:

$$q(t) = q_0 + n_3 t \quad (40)$$

where: $n_3 = n_1 \times n_2$, $q_0 = [X_0, Y_0, Z_0]^T$ and planes

$$\rho_1 : n_1^T x + d_1 = 0 \quad \rho_2 : n_2^T x + d_2 = 0$$

The intersection point X_0 of three planes in the Euclidean coordinates is defined as:

$$X_0 = \frac{d_2 \begin{vmatrix} b_1 & c_1 \\ b_3 & c_3 \end{vmatrix} - d_1 \begin{vmatrix} b_2 & c_2 \\ b_3 & c_3 \end{vmatrix}}{DET}$$

$$Y_0 = \frac{d_2 \begin{vmatrix} a_3 & c_3 \\ a_1 & c_1 \end{vmatrix} - d_1 \begin{vmatrix} a_3 & c_3 \\ a_2 & c_2 \end{vmatrix}}{DET} \quad (41)$$

$$Z_0 = \frac{d_2 \begin{vmatrix} a_1 & b_1 \\ a_3 & b_3 \end{vmatrix} - d_1 \begin{vmatrix} a_2 & b_2 \\ a_3 & b_3 \end{vmatrix}}{DET}$$

$$DET = \begin{vmatrix} a_1 & b_1 & c_1 \\ a_2 & b_2 & c_2 \\ a_3 & b_3 & c_3 \end{vmatrix}$$

If a line is defined by two points and $\|\omega\| = 1$, i.e. the directional vector is normalized, we get Eq.34 and the line is simply determined as:

$$q(t) = v \times \omega + \omega t \quad (42)$$

If a line is defined by two planes and $\|v\| = 1$, i.e. the positional vector is normalized, we get Eq.38 and the line is simply determined as:

$$q(t) = \omega \times v + vt \quad (43)$$

Those formulae are well known if the Euclidean coordinates are used.

Note:

It is possible to define vectors v and ω for the plane intersection case as $v = [l_{41}, l_{42}, l_{43}]^T$ and $\omega = [l_{23}, l_{31}, l_{12}]^T$, i.e. with swapped Plücker vectors, and have the same equation for the line $q(t)$ but the symbols would have different interpretation – that is the reason, why the priority was given to different notation for those two cases.

5. Conclusion

This paper presents a new approach computation of:

- a line in the E^2 and a plane in the E^3 ,
- an intersection point of two lines in the E^2 and three planes in the E^3 ,
- a parametric equation of a line in the E^3 if given by two points or two planes in the E^3 ,

using the homogeneous coordinates directly has been presented. The presented approach enables a unified solution for the case when the line is given by two points in E^3 and also as an intersection of two planes

in homogeneous coordinates directly. The presented approach uses the projective space, the principle of duality and gives several advantages over the known approaches like robustness, and avoiding division operation. It also simplifies some algorithms, e.g. line clipping and offers additional algorithms speed-ups [9] and new formula developments [10].

There is a hope that the Plücker coordinates and the projective space representation will be useful for development of new methods based on intersection computation and will allow derivation of robust algorithms with higher efficiency. Many interesting hints for more general approach can be found in [11], [12].

6. Acknowledgments

The author would like to express his thanks to PhD and MSc. students and colleagues at the University of West Bohemia for recommendations, constructive discussions and their hints that helped to finish the work and improve this manuscript.

This work was supported by the Ministry of Education of the Czech Republic – Project Virtual No. 2C06002 .

7. Appendix A

There is a double cross-product used in deriving Eq.34 from Eq.33. Let us review the double cross-product equality.

Definition

Let \mathbf{a} , \mathbf{b} and \mathbf{c} are vectors. Then:

$$\mathbf{a} \times (\mathbf{b} \times \mathbf{c}) = (\mathbf{a} \cdot \mathbf{c}) \cdot \mathbf{b} - (\mathbf{a} \cdot \mathbf{b}) \cdot \mathbf{c} = (\mathbf{a}^T \mathbf{c}) \cdot \mathbf{b} - (\mathbf{a}^T \mathbf{b}) \cdot \mathbf{c} \quad (45)$$

$$(\mathbf{a} \times \mathbf{b}) \times \mathbf{c} = (\mathbf{c} \cdot \mathbf{a}) \cdot \mathbf{b} - (\mathbf{c} \cdot \mathbf{b}) \cdot \mathbf{a} = (\mathbf{c}^T \mathbf{a}) \cdot \mathbf{b} - (\mathbf{c}^T \mathbf{b}) \cdot \mathbf{a}$$

where: “ $\mathbf{a} \cdot \mathbf{b}$ ” means the “dot-product” of vectors \mathbf{a} and \mathbf{b} is equivalent to scalar multiplication and $()^T$ means a vector transposition.

Let us reconsider the Eq.33:

$$\boldsymbol{\omega} \times \mathbf{q} = \mathbf{v} \quad (46)$$

and the line $\mathbf{q}(t)$ equation:

$$\mathbf{q}(t) = \mathbf{q}_1 + \boldsymbol{\omega} t \quad (47)$$

Then the left hand side of Eq.46 multiplied by $\boldsymbol{\omega}$ from the right:

$$(\boldsymbol{\omega} \times \mathbf{q}) \times \boldsymbol{\omega} = (\boldsymbol{\omega} \cdot \boldsymbol{\omega}) \cdot \mathbf{q} - (\boldsymbol{\omega} \cdot \mathbf{q}) \cdot \boldsymbol{\omega} = \|\boldsymbol{\omega}\|^2 \mathbf{q} - 0 = \|\boldsymbol{\omega}\|^2 \mathbf{q} \quad (48)$$

It can be seen that the vectors $\boldsymbol{\omega}$ and \mathbf{v} are orthogonal, see Eq.33, i.e. $\boldsymbol{\omega} \cdot \mathbf{v} = 0$, and therefore the Eq.46 becomes:

$$\|\boldsymbol{\omega}\|^2 \mathbf{q} = \mathbf{v} \times \boldsymbol{\omega} \quad (49)$$

This equality must be valid also for the point \mathbf{q}_1 and therefore:

$$\|\boldsymbol{\omega}\|^2 \mathbf{q}_1 = \mathbf{v} \times \boldsymbol{\omega} \quad (50)$$

and if $\|\boldsymbol{\omega}\|^2 \neq 0$ we can write:

$$\mathbf{q}_1 = \mathbf{v} \times \boldsymbol{\omega} / \|\boldsymbol{\omega}\|^2 \quad (51)$$

Substituting (51) to (47) we obtain:

$$\mathbf{q}(t) = \mathbf{v} \times \boldsymbol{\omega} / \|\boldsymbol{\omega}\|^2 + \boldsymbol{\omega} t \quad (52)$$

that is identical with an Eq.34.

8. References

1. Stolfi, J.: *Oriented Projective Geometry*, Academic Press, 2001.
2. Hartley, R., Zisserman, A.: *MultiView Geometry in Computer Vision*, Cambridge University Press, 2000.
3. Coxeter, H.S.M.: *Introduction to Geometry*, John Wiley, 1961.
4. Johnson, M.: *Proof by Duality: or the Discovery of “New” Theorems*, Mathematics Today, December 1996.
5. Vince, J.: *Geometry for Computer Graphics*, Springer Verlag, 2004
6. Blinn, J.F.: *A Homogeneous Formulation for Lines the in E3 Space*, ACM SIGGRAPH, Vol.11., No.2., pp.237-241, 1997.
7. F. Klein, *Notiz Betreffend dem Zusammenhang der Liniengeometrie mit der Mechanik starrer Körper.*, Math. Ann. 4, pp.403- 415, 1871
8. Gibson, C.G. and Hunt, K.H.: *Geometry of Screw Systems. Mech. Machine Theory, Vol.12, pp.1-27*, 1992
9. Skala, V.: *A New Line Clipping Algorithm with Hardware Acceleration*, CGI'2004 conference proceedings, IEEE, Greece, 2004
10. Skala, V.: *Length, Area and Volume Computation in Homogeneous Coordinates*, International Journal of Image and Graphics, Vol.6., No.4, pp.625-639, 2006.
11. Hildenbrand, D., Fontijne, D., Perwass, C., Dorst, L.: *Geometric Algebra and its Application to Computer Graphics*, Eurographics 2004 Tutorial, pp.1-49, 2004.
12. Ma, Y., Soatto, S., Kosecka, J., Sastry, S.S.: *An Invitation to 3D Vision*, Springer Verlag, ISBN 0-387-00893-4, 2004
13. Hill, F.S.: *Computer Graphics using OpenGL*, Prentice Hall, pp.827, 2001
14. Birchfield, S.: *An Introduction to Projective Geometry (for Computer Vision)* <http://vision.stanford.edu/~birch/projective/projective.pdf>, 1998
15. Chevalley, C.: *Fundamental Concepts of Algebra*, Academic Press, pp.201-203, 1956,
16. Hanrahan, P.: *Ray-Triangle and Ray-Quadrilateral Intersections in Homogeneous Coordinates*, <http://graphics.stanford.edu/courses/cs348b-04/rayhomo.pdf>, (unpublished) 1989
17. Mohr, R., Triggs, B.: *Projective Geometry for Image Analysis*, Tutorial notes, <http://www.inrialpes.fr/movi>, 1996
18. Skala, V.: *A new Approach to Line and Line Segment Clipping in Homogeneous Coordinates*, The Visual Computer, Vol.21, No.11, pp. 905-914, 2005
19. Yamaguchi, F.: *Computer-Aided geometric Design – A Totally Four Dimensional Approach*, Springer Verlag, 1996
20. Yamaguchi, F., Niizeki, M.: *Some basic geometric test conditions in terms of Plücker coordinates and Plücker coefficients*, The Visual Computer, Vol.13, pp.29-41, 1997