


Ra 6,4

2806

100 350 $+0,03$ $-0,01$ Ra 1,6 $\varnothing 460$ $\varnothing 360$ r 5 Ra 1,6 77 330 $+0,1$ $-0,1$ 175 Ra 1,6 $\varnothing 220$ h 6

$\varnothing 360$ r 6 $\varnothing 180$ h 6 $\varnothing 230$


⊙ 0.01 A ⊥ 0.02 B Ra 1,6 ⊥ 0.02 B Ra 1,6 ⊥ 0.02 B ↗ 0.01 B ↗ 0.015 A

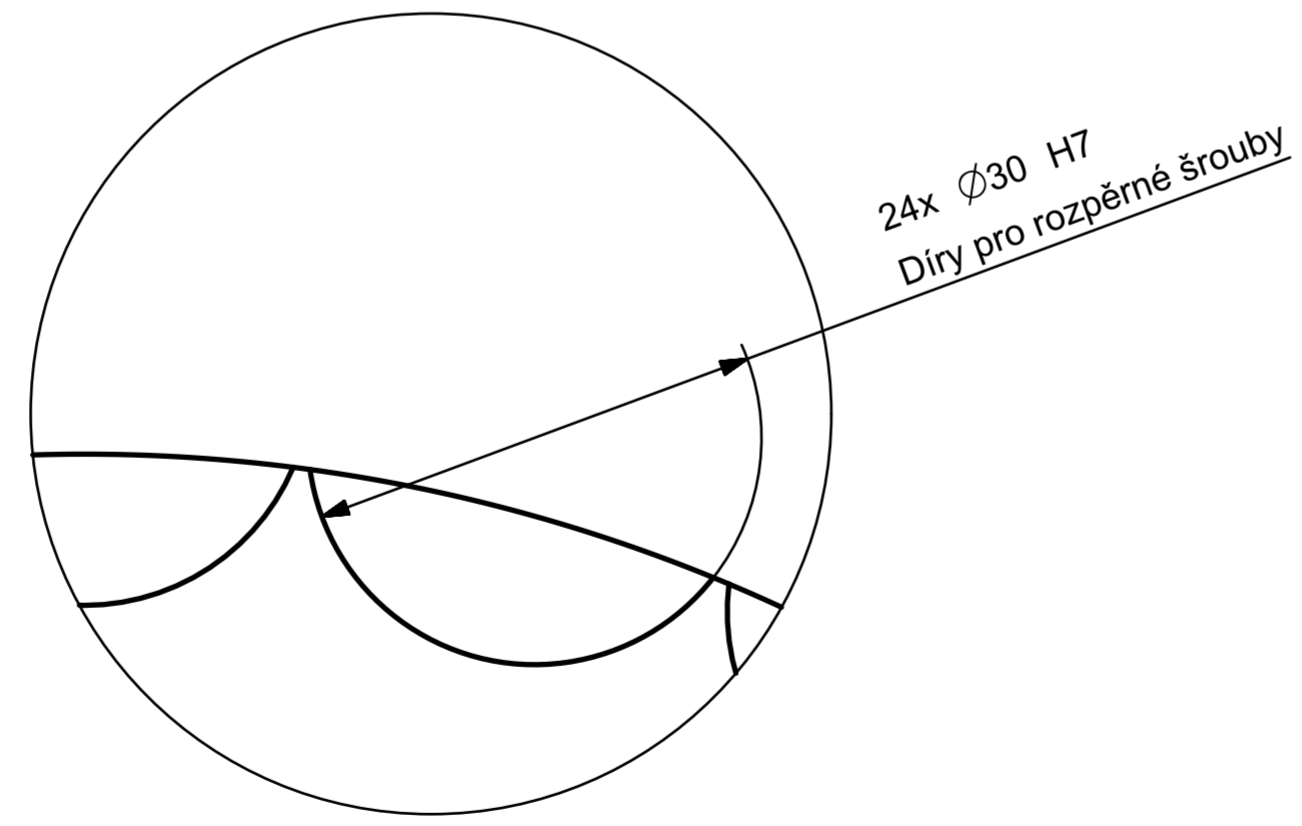

24x $\varnothing 30$ H7
Díry pro rozpěrné šrouby

DETAIL A
SCALE 2:1

Přesnost ISO 2768 - mK
Tolerování ISO 8015
Díry 24x $\varnothing 30$ H7 vrtat společně s pastorkem Všechny hrany srazit na 5x45°

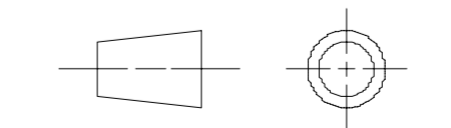

ALL DIMENSIONS IN MM

SIEMENS		THIS DRAWING HAS BEEN PRODUCED USING AN EXAMPLE TEMPLATE PROVIDED BY SIEMENS PLM SOFTWARE	
FIRST ISSUED	27.7.2020	TITLE	
DRAWN BY	Procházka	Hřídel_motor_pastorek	
CHECKED BY		SIZE	DRG NO.
APPROVED BY		A2	hridel_motor_pastorek_kratsi_vykres
		SCALE 1:5	SHEET 1 OF 1

SHEET REV

A

A2